


IN39006 Series

Steel | Low Profile | Splined | Open End

Low profile head. Optimal for low load bearing applications in thin sheet. Dimensioned for installation into hard metric holes. Splined body improves torque-to-turn resistance.

Material: Low carbon steel to BS 970 040A04 SAE 1008

Finish: Zinc clear Cr3

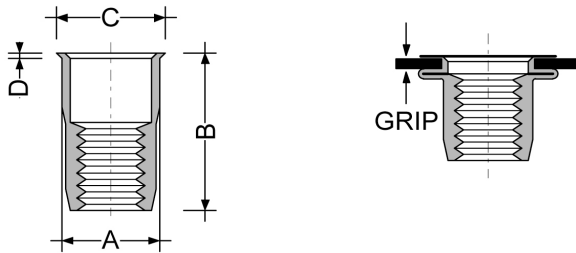

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M3	IN39006-0315	0.5-1.5	5.0	4.95	9.00	5.7	0.4	2.9	0.5	2.0
	IN39006-0425	0.5-2.5	6.0	5.95	11.2	6.5	0.45	5.9	1.2	2.9
M4	IN39006-0440	2.5-4.0	6.0	5.95	12.0	6.5	0.45	5.9	1.2	2.9
	IN39006-0530	0.5-3.0	7.0	6.95	12.0	7.6	0.5	8.8	1.4	8.8
M5	IN39006-0540	2.5-4.0	7.0	6.95	14.0	7.6	0.5	5.9	1.4	5.9
	IN39006-0630	0.5-3.0	9.0	8.95	15.0	10.0	0.5	13.7	2.5	9.8
M6	IN39006-0650	3.0-5.0	9.0	8.95	17.0	10.0	0.5	10.8	2.5	9.8
	IN39006-0830	0.5-3.0	11.0	10.95	17.3	12.0	0.5	14.7	2.9	19.6
M8	IN39006-0855	3.0-5.5	11.0	10.95	18.5	12.0	0.5	12.7	2.9	19.6
	IN39006-1040	1.0-4.0	13.0	12.95	20.5	14.0	0.6	24.5	3.5	29.4
M10	IN39006-1060	4.0-6.0	13.0	12.95	23.5	14.0	0.6	22.6	3.5	49.0
	IN39006-1240	1.0-4.0	16.0	15.90	24.0	17.1	0.6	34.3	3.9	—
M12	IN39006-1260	4.0-6.0	16.0	15.90	27.0	17.1	0.6	32.4	3.9	—

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.
 The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
 We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
 LAST UPDATED - NOVEMBER 2017