


## IN39102 Series

Stainless Steel | Hex Body | Low Profile | Open End

Low profile head, used in conjunction with a metric hexagon hole to give maximum resistance to applied torque or unscrewing torque.

**Material:** 304 (A2) Stainless Steel

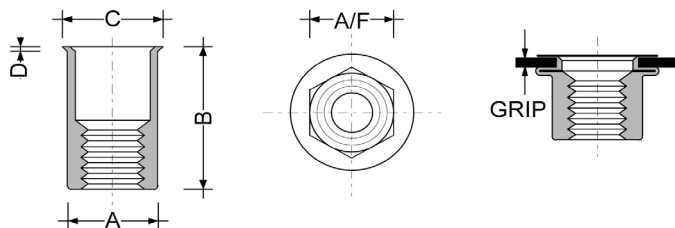

Thread Size	Part Code	Grip mm	Hex Hole A/F mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M4	IN39102-0425	0.5-2.5	6.0	5.9	11.0	7.0	0.5	7.8	2.0	5.9
	IN39102-0530	0.5-3.0	7.0	6.9	12.0	8.0	0.5	12.7	2.5	13.7
M5	IN39102-0545	3.0-4.5	7.0	6.9	13.5	8.0	0.5	13.7	2.0	12.7
	IN39102-0630	0.5-3.0	9.0	8.9	14.0	10.0	0.5	20.6	3.9	15.7
M6	IN39102-0650	3.0-5.0	9.0	8.9	16.0	10.0	0.5	20.6	3.9	15.7
	IN39102-0830	0.5-3.0	11.0	10.9	16.0	12.0	0.5	30.4	3.9	39.2
M8	IN39102-0850	3.0-5.0	11.0	10.9	18.5	12.0	0.5	30.4	3.9	39.2
M10	IN39102-1035	1.0-3.5	13.0	12.9	19.0	14.2	0.7	33.3	4.1	-

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.

The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.

We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.

LAST UPDATED - DECEMBER 2017