


IN9408 Series

Steel | Large Flange | Splined | Open End

Optimal for high push-out applications. Dimensioned for installation into hard metric holes. Tapered entry. Splined body improves torque-to-turn resistance.

Material: Low carbon steel to BS 970 040A04 SAE 1008 DIN 1654

Finish: Zinc Clear Cr3

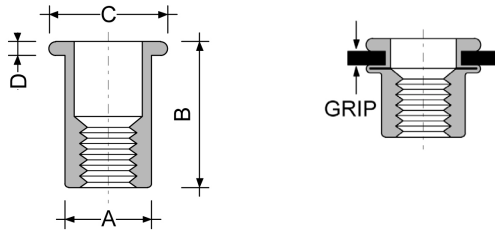

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M3	IN9408-0320	0.5-2.0	5.0	4.95	10.5	8.0	0.7	4.9	1.0	2.0
	IN9408-0425	0.5-2.5	6.0	5.95	11.0	9.0	0.8	5.9	2.0	2.9
M4	IN9408-0440	2.5-4.0	6.0	5.95	12.5	9.0	0.8	5.9	2.0	2.9
	IN9408-0530	0.7-3.0	7.0	6.95	13.0	10.0	1.0	7.8	2.9	7.8
M5	IN9408-0545	2.5-4.5	7.0	6.95	14.5	10.0	1.0	7.8	2.9	7.8
	IN9408-0630	0.8-3.0	9.0	8.95	16.5	13.0	1.5	13.7	3.9	9.8
M6	IN9408-0650	3.0-5.0	9.0	8.95	18.5	13.0	1.5	13.7	3.9	9.8
	IN9408-0830	1.0-3.0	11.0	10.95	17.5	16.0	1.5	14.2	4.9	19.6
M8	IN9408-0855	3.0-5.5	11.0	10.95	21.0	16.0	1.5	14.2	4.9	19.6
	IN9408-1040	1.0-4.0	13.0	12.95	24.0	19.0	2.0	28.4	8.8	29.4
M10	IN9408-1060	4.5-6.0	13.0	12.95	25.5	19.0	2.0	28.4	8.8	29.4
	IN9408-1240	1.0-4.0	16.0	15.95	25.2	21.7	2.0	30.4	10.8	68.6
M12	IN9408-1270*	4.0-7.0	16.0	15.95	30.0	21.7	2.0	30.4	10.8	68.6
	IN9408-1650*	1.0-5.0	21.0	20.95	32.8	26.0	2.5	-	-	-

Non Splined Body*

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data. LAST UPDATED - NOVEMBER 2017