

IN9408S A4 Series


Stainless Steel | Large Flange | Splined | Open End

Optimal for high push-out applications. Dimensioned for installation into hard metric holes. Tapered entry. Splined body improves torque-to-turn resistance.

Material: 316 (A4) Stainless Steel



STAINLESS STEEL

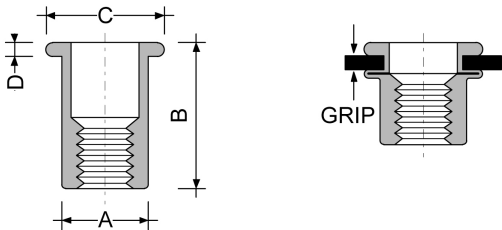

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M4	IN9408S-0425A4	0.3-2.5	6.0	5.95	12.0	9.0	1.0	9.8	4.9	4.9
M5	IN9408S-0530A4	0.3-3.0	7.0	6.95	13.0	10.0	1.0	15.7	6.9	8.8
M6	IN9408S-0630A4	0.5-3.0	9.0	8.95	15.5	12.0	1.5	20.6	9.8	15.7
M8	IN9408S-0830A4	0.5-3.0	11.0	10.95	17.5	15.0	1.5	29.4	12.7	29.4
M10	IN9408S-1035A4	1.0-3.5	13.0	12.95	21.0	17.0	2.0	42.2	15.7	39.2

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.
The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.