


## IN9410 Series

Steel | Large Flange | Closed End

Optimal for high push-out applications. Dimensioned for installation into hard metric holes. Tapered entry. For applications where sealing to prevent the ingress of solids or moisture is desirable.

**Material:** Low carbon steel to BS 970 040A04 SAE 1008 DIN 1654

**Finish:** Zinc plated to BS 3382

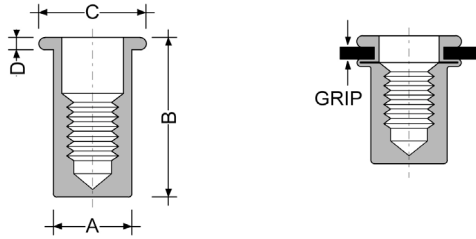

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
<b>M4</b>	IN9410-0425	0.5-2.5	6.0	5.9	15.7	9.0	0.8	5.7	2.1	4.9
<b>M5</b>	IN9410-0525	0.5-2.5	7.0	6.9	18.0	10.0	1.0	10.7	3.0	7.8
<b>M6</b>	IN9410-0630	0.7-3.0	9.0	8.9	21.5	13.0	1.5	11.1	5.3	12.7
<b>M8</b>	IN9410-0830	0.7-3.0	11.0	10.9	24.5	16.0	1.5	18.1	6.9	16.7
<b>M10</b>	IN9410-1035	1.0-3.5	13.0	12.9	33.0	19.0	2.0	28.6	8.7	40.0

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.  
 The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.  
 We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.  
 LAST UPDATED - NOVEMBER 2017