


## IN9498 Series

Steel | Hex Body | Large Flange | Open End

Large flange head, used in conjunction with a hexagon hole to give maximum resistance to applied torque or unscrewing torque.

**Material:** Low carbon steel

**Finish:** Zinc plated and gold passivated

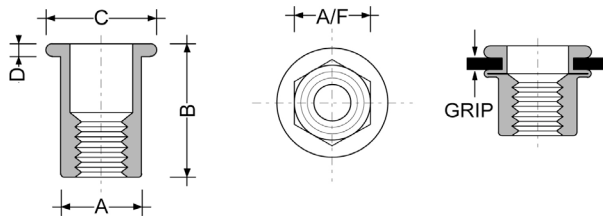

Thread Size	Part Code	Grip mm	Hex Hole A/F mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
<b>M4</b>	IN9498-0420	0.5-2.0	6.0	5.9	11.2	9.0	0.8	6.9	2.0	4.9
<b>M5</b>	IN9498-0530	0.5-3.0	7.0	6.9	13.0	10.0	1.0	10.8	3.9	7.8
<b>M6</b>	IN9498-0630	0.5-3.0	9.0	8.9	16.0	13.0	1.5	14.7	5.9	9.8
<b>M8</b>	IN9498-0830	0.5-3.0	11.0	10.9	18.0	16.0	1.5	23.5	6.9	19.6
<b>M10</b>	IN9498-1045	1.0-4.5	13.0	12.9	24.0	19.0	2.0	34.3	9.8	49.0
	IN9498-1060	4.0-6.0	13.0	12.9	25.5	19.0	2.0	33.3	10.8	49.0
<b>M12</b>	IN9498-1240	1.5-4.0	16.0	15.9	27.0	23.0	2.0	49.0	13.7	–

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.  
 The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.  
 We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.  
 LAST UPDATED - NOVEMBER 2017