


Rivstud Series

Steel | Splined | Flanged Head

Flat head with splined body, designed for use in hard metric dimensioned drilled or punched holes. Rivstuds feature a RivNut body with a welded-in-place mating stud and can be used as an alternative to weld-studs or clinch-studs. Rivstuds are also useful to support heavy components on a vertical surface before final assembly is made.

Material: Low carbon steel

Finish: Zinc clear Cr3

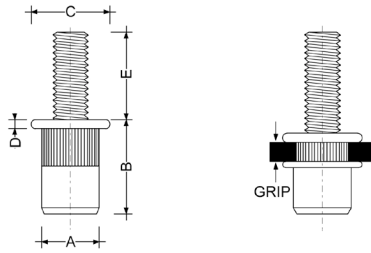

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	E mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M4	IN-RS0425-15	0.5 - 2.5	6.0	5.95	12.0	9.0	1.0	15	7.8	2.9	5.9
M5	IN-RS0530-15	0.5 - 3.0	7.0	6.95	13.0	10.0	1.0	15	7.8	2.9	7.0
	IN-RS0530-20	0.5 - 3.0	7.0	6.95	13.0	10.0	1.0	20	7.8	2.9	7.0
	IN-RS0530-25	0.5 - 3.0	7.0	6.95	13.0	10.0	1.0	25	7.8	2.9	7.0
M6	IN-RS0630-15	0.5 - 3.0	9.0	8.95	15.5	13.0	1.5	15	12.7	3.9	9.8
	IN-RS0630-20	0.5 - 3.0	9.0	8.95	15.5	13.0	1.5	20	12.7	3.9	9.8
	IN-RS0630-25	0.5 - 3.0	9.0	8.95	15.5	13.0	1.5	25	12.7	3.9	9.8
M8	IN-RS0830-15	0.5 - 3.0	11.0	10.95	17.5	16.0	1.5	15	18.6	5.9	19.6
	IN-RS0830-20	0.5 - 3.0	11.0	10.95	17.5	16.0	1.5	20	18.6	5.9	19.6

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.
 The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
 We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
 LAST UPDATED - DECEMBER 2017