


## SR Series - STAINLESS STEEL

SR Series rivets are blind rivets with a mechanically locked mandrel. They are optimal for structural or demanding applications. Installed easily from one side, the rivet features impressive installed values, excellent hole fill, generous grip range, pressure tight seal and flush breaking mandrel regardless of material thickness.



**Material:** Body: Austenitic Stainless Steel AISI 304 Cu    **Finish:** Body: Natural  
Mandrel: Austenitic Stainless Steel AISI 304 Cu                      Mandrel: Natural

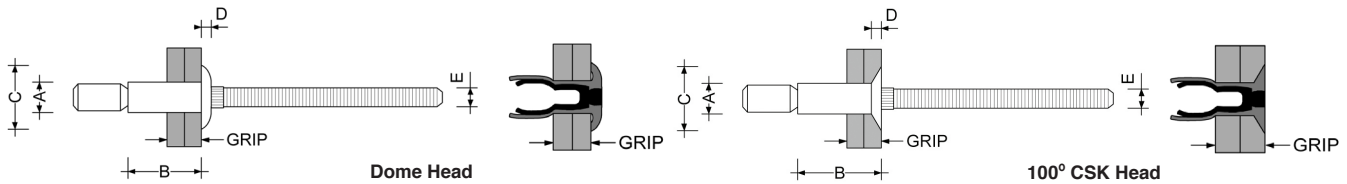

Diameter	Part Code	Grip	Hole	A	B	C	D	E	Shear	Tensile
mm		mm	mm	mm	mm	mm	mm	mm	KN	KN

### Stainless Steel Rivet | Stainless Steel Mandrel | Dome Head

<b>4.8</b>	SRDU-0604	1.60 - 6.40	5.0	4.8	10.5	9.80	2.1	3.0	6.2	4.4
	SRDU-0607XG	1.60 - 11.1	5.0	4.8	14.5	9.80	2.1	3.0	6.2	4.4
<b>6.4</b>	SRDU-0806	2.00 - 9.50	6.8	6.4	14.2	13.3	2.8	4.0	11.1	8.3
	SRDU-0810XG	2.00 - 15.9	6.8	6.4	20.5	13.3	2.8	4.0	11.1	8.3
	SRDU-0814	14.0 - 22.0	6.8	6.4	26.6	13.3	2.8	4.0	11.1	8.3
<b>7.8</b>	SRDU-1010	4.00 - 16.0	8.0	7.8	21.0	16.0	3.5	5.1	17.7	11.8
<b>9.5</b>	SRDU-1212	3.00 - 16.0	9.8	9.5	21.3	20.0	3.5	5.8		

### Stainless Steel Rivet | Stainless Steel Mandrel | 100° Countersunk Head

<b>4.8</b>	SR100-U606	3.20 - 8.00	5.0	4.8	14.1	8.90	1.8	3.0	6.2	4.4
	SR100-U609	7.00 - 12.7	5.0	4.8	17.1	8.90	1.8	3.0	6.2	4.4
<b>6.4</b>	SR100-U808	3.20 - 11.1	6.8	6.4	18.7	11.0	2.0	4.0	11.1	8.3
	SR100-U812	10.5 - 18.4	6.8	6.4	23.1	11.0	2.0	4.0	11.1	8.3

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.

LAST UPDATED - JUNE 2018