


STANDARD RIVETS - TRUSS HEAD (6.4-7.8)

CODING GUIDE

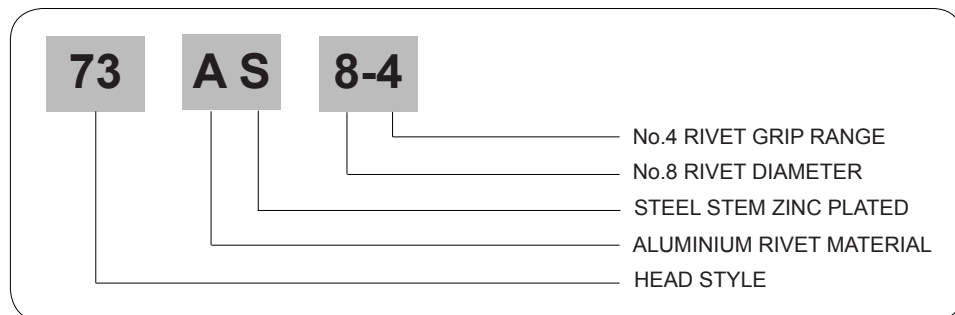

AS

ALUMINIUM RIVET
AlMg3.5 STEEL
STEM ZINC PLATED

SS

STEEL RIVET ZINC
PLATED STEEL
STEM ZINC PLATED

Diameter	Part Code	Grip		Drill Size	Length	
		mm	inches		mm	inches
No.8 1/4" 6.4 mm	8 - 4	4.8 - 6.4	3/16 - 1/4	6.5	12.7	1/2
	8 - 6	6.4 - 9.5	5/16 - 3/8		15.9	5/8
	8 - 8	9.5 - 12.7	3/8 - 1/2		19.1	3/4
	8 - 10	13.0 - 17.0	1/2 - 5/8		21.0	7/8
	8 - 12	16.0 - 19.0	5/8 - 3/4		25.4	1.00
	8 - 16	19.0 - 25.0	7/8 - 1.00		31.8	1-1/4
	8 - 19	25.4 - 29.5	1.00 - 1-1/8		35.0	1-3/8
	8 - 22	29.5 - 35.0	1-1/8 - 1-3/8		40.0	1-5/8
No. 10 5/16" 7.8mm	10 - 6	4.0 - 9.5		8	15	
	10 - 8	9.5 - 12.5			18	
	10 - 10	12.5 - 16.5			22	
	10 - 12	16.5 - 20.5			26	
	10 - 16	20.5 - 24.5			30	
	10 - 18	24.5 - 29.5			35	
	10 - 21	29.5 - 34.5			40	

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.
The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.

0413